



Jiangsu Runda PV Co.,Ltd.


Aurora Pro

N-Type

S8B-108GANT 405~425W

Bifacial Dual Glass

Mono Black Module

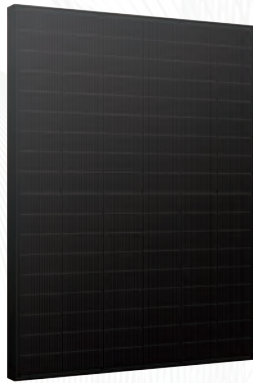

425W

Maximum Power Output

21.76%

Maximum Module Efficiency

0~+5W

Power Output Tolerance

IEC61215, IEC61730
ISO9001:2015: Quality Management System
ISO14001:2015: Environment Management System
ISO45001:2018: Occupational health and safety management systems



10%-30% Additional Power Generation

- 30 years lifespan brings 10-30% additional power generation comparing with conventional P-type module



Outstanding Low Light Performance

- Higher power output even under low-light environments like on cloudy or foggy days.



Zero LID (Light Induced Degradation)

- N-type solar cell has no LID naturally which can increase power generation



Better Temperature Coefficient

- Higher power generation under working conditions, thanks to passivating contact cell technology



PID Resistance

- Excellent Anti-PID performance guarantee via optimized mass-production process and materials control



Enhanced Mechanical Load

- Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal)



Lower LCOE


- Higher bifaciality, higher power output and lower BOS cost



Outstanding visual appearance

- Designed with aesthetics in mind, thinner wires that appear all black at a distance

Linear Performance Warranty

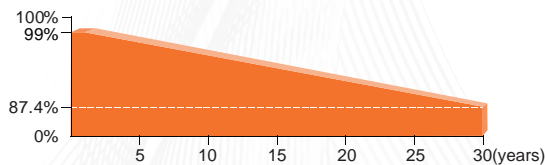

12 Years Product Warranty on Materials and Workmanship

30 Years Linear Performance Warranty

0.40% Subsequent Annual Degradation

Tel: +86-0510-83801000 Fax: +86-0510-83802000
Web: www.rundapv.com E-mail: sales@rundapv.com
Add: Yanxiang Road 108, Ehu Town, Xishan District, Wuxi City, Jiangsu Province, P.R.China



Balerina-GreenEnergy s.r.o.
Přestavlká 1447
295 01 Mnichovo Hradiště
Česká republika

Tel.: 326 773 391
E-mail: info@balerina-greenenergy.cz
www.balerina-greenenergy.cz





Aurora Pro

RS405~425S8B-108GANT

Electrical Properties(STC*)					
Power Output(Wp)	405	410	415	420	425
Max Power Tolerance(W)	0-5	0-5	0-5	0-5	0-5
Module Efficiency(%)	20.74	21.00	21.25	21.51	21.76
Voltage Mpp-Vmpp(V)	31.06	31.25	31.44	31.63	31.81
Current Mpp-Impp(A)	13.04	13.12	13.20	13.28	13.36
Voltage Open Circuit-Voc(V)	37.45	37.64	37.83	38.02	38.21
Short Circuit Current-Isc(A)	13.81	13.89	13.97	14.05	14.13

*STC: Irradiance 1000W/m², Cell Temperature 25°C, AM 1.5


Electrical Properties(NOCT*)					
Power Output(Wp)	306	310	314	318	322
Voltage Mpp-Vmpp(V)	29.20	29.38	29.57	29.75	29.93
Current Mpp-Impp(A)	10.48	10.55	10.62	10.69	10.76
Voltage Open Circuit-Voc(V)	35.59	35.78	35.97	36.16	36.35
Short Circuit Current-Isc(A)	11.12	11.18	11.24	11.31	11.37

*NOCT: Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

With Different Power Generation Gain (regarding 415W as an example)					
Power Gain (%)	Power Output (Wp)	Voltage Mpp-Vmpp (V)	Current Mpp-Impp (A)	Voltage Open Circuit-Voc (V)	Short Circuit Current-Isc (A)
10	457	31.44	14.52	37.83	15.37
15	477	31.44	15.18	37.83	16.07
20	498	31.44	15.84	37.83	16.76
25	519	31.44	16.50	37.83	17.46
30	540	31.44	17.16	37.83	18.16




Packaging Configuration	
Packing Type	40'HQ
Piece/Pallet	36
Piece/Container	936

Engineering Drawing (mm)

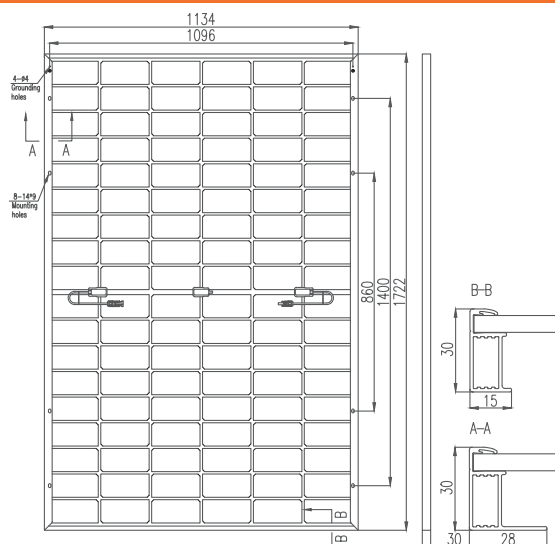

Jiangsu Runda PV Co.,Ltd.

Characteristic Curves(415W)



Mechanical Properties

Cell Size	182mm*91mm
Number of Cells	108 [2 x (9 x 6)]
Module Dimension	1722*1134*30mm
Weight	25kg
Front Glass	2.0mm, Anti-Reflection Coating
Rear Glass	2.0mm, Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 (3 diodes)
Cable Length	TUV 1x4.0mm ² , (+):300mm/ (-):200mm or Customized length

Operating Properties

Operating Temperature	-40°C~+85°C
Maximum System Voltage	1500V DC (IEC)
Maximum Series Fuse Rating	30A
Power Tolerance	0~+5W
Bifaciality	80±5%

Temperature Coefficient

Temperature Coefficient of Pmax	-0.310%/°C
Temperature Coefficient of Voc	-0.26%/°C
Temperature Coefficient of Isc	0.046%/°C
Nominal Operating Cell Temperature (NOCT)	42±2°C

Specifications included in this datasheet are subject to change without notice.

Balerina-GreenEnergy s.r.o.
Přestavlká 1447
295 01 Mnichovo Hradiště
Česká republika

Tel.: 326 773 391
E-mail: info@balerina-greenenergy.cz
www.balerina-greenenergy.cz

